



Wheel Loader & Attachments Catalogue 2026

Wheel loader range · Attachments for agriculture, construction and logistics

2026

Construction · Agriculture · Logistics

G&P Benelux

Designed by Pinky Creative Studio — stopmetzoeken.store

Table of Contents

HOFLADER

GP 1200 RED	4
GP 2000 RED	5
GP 800	6

ATTACHMENTS

Ballenzange BZ-01	8
Ballenzange MAXI BZ-02	9
Quaderballenzange QBZ-01	10
Palettengabel PG-01 80x40x1200	11
Universalschaufel US-01	12
Hochkippmulde GPLDW-01	13
Schüttmulde GPKL-01	14
Pelikanschaufel GPLKP-01	15
Pelikanschaufel GPLKK-01	16
Mistzange GPKK-01	17
Pflastergabel GPWK-01	18
Güllemixer GPMG-01	19

Hoflader



Compact wheel loaders for agriculture, construction and logistics. Agile, powerful, reliable.

GP 1200 RED

Hoflader

NEW



Compact articulated loader GP 1200 with Yanmar 3TNV88F (Euro 5), 18.2 kW. Lift force 1750 kg, operating weight 2950 kg, hydrostatic drive. Work height 3615 mm.

TECHNICAL DATA

ENGINE

Yanmar 3TNV88F

POWER (KW)

18.2

EMISSION

Euro 5

CYLINDERS

3

OPERATING WEIGHT (KG)

2950

LIFT FORCE (KG)

1750

RATED LOAD (KG)

800

TOP SPEED (KM/H)

0-11 / 0-20

DRIVE

Hydrostatic

WHEELBASE (MM)

1690

GROUND CLEARANCE (MM)

240

TORQUE (NM)

82,6-91,4 @ 1320 rpm

GP 2000 RED

Hoflader

NEW



Wheel loader GP 2000 with Yunnei DEF20CFG4 (Euro 5), 36.8 kW, optional Yanmar 4TNV88C. Lift force 2480 kg, operating weight 3500 kg, automatic gearbox. Work height 3810 mm.

TECHNICAL DATA

ENGINE

Yunnei DEF20CFG4

POWER (KW)

36.8

EMISSION

Euro 5

CYLINDERS

4

OPERATING WEIGHT (KG)

3500

LIFT FORCE (KG)

2480

TOP SPEED (KM/H)

0-7 / 0-22

DRIVE

Automatic gearbox

WHEELBASE (MM)

2270

GROUND CLEARANCE (MM)

220

TORQUE (NM)

183 / 1500-1800

GP 800

Hoflader



The GP 800 is a compact and agile wheel loader for daily professional use in agriculture, horticulture, construction and warehousing. The liquid-cooled Yanmar 3TNV80F three-cylinder diesel engine (Euro V) delivers 17.8 kW and 60-64 Nm of torque at 1900 rpm for reliable power in every situation.

With an operating weight of 1935 kg, the GP 800 carries a rated load of 600 kg and reaches a maximum lift force of 1100 kg. The tipping load per ISO 8313 is 850 kg straight ahead and 550 kg when turning. The maximum lift height of 3400 mm and a dump height of 2200 mm allow fast loading and unloading.

TECHNICAL DATA

ENGINE

Yanmar 3TNV80F

POWER (KW)

17.8

EMISSION

Euro V

CYLINDERS

3

OPERATING WEIGHT (KG)

1935

RATED LOAD (KG)

600

TOP SPEED (KM/H)

12

DRIVE

Hydrostatic 4x4

WHEELBASE (MM)

1400

GROUND CLEARANCE (MM)

160

TORQUE (NM)

60-64

Attachments



Attachments for every job. Tool-free quick-change system.

ATTACHMENTS

Ballenzange BZ-01

Hydraulic bale clamp with quick-change frame for round bales. Single-cylinder gripper, working width 0.80 to 1.75 m, reinforced grippers from 10 mm steel plate. Fully powder-coated. Lift capacity 1100 kg, weight 170 kg.



TECHNICAL DATA

- › Compatible with the GP Hoflader range
- › Heavy-duty steel construction
- › Mounting to your specification
- › Spare parts & service on request: DE / NL / EN / FR

ATTACHMENTS

Ballenzange MAXI BZ-02

Reinforced bale clamp with quick-change frame and single-cylinder gripper. Large working width from 0.80 to 2.10 m, grippers from 10 mm steel plate, greased bushings with grease nipple. Fully powder-coated. Lift capacity 1350 kg, weight 230 kg.



TECHNICAL DATA

- › Compatible with the GP Hoflader range
- › Heavy-duty steel construction
- › Mounting to your specification
- › Spare parts & service on request: DE / NL / EN / FR

ATTACHMENTS

Quaderballenzange QBZ-01

Square bale clamp with two double-acting hydraulic cylinders and pressure-holding valve. Round, reinforced support arms (1100 mm long, 500 mm high), opening width 700 to 2005 mm. Includes 2000 mm hydraulic hose. Width 1150 mm, height 675 mm, lift capacity 1500 kg.



TECHNICAL DATA

- › Compatible with the GP Hoflader range
- › Heavy-duty steel construction
- › Mounting to your specification
- › Spare parts & service on request: DE / NL / EN / FR

ATTACHMENTS

Palettengabel PG-01 80x40x1200

Pallet fork with tines 80x40x1200 mm. Robust design for daily use. Lift capacity 2.0 t.




TECHNICAL DATA

- › Compatible with the GP Hoflader range
- › Heavy-duty steel construction
- › Mounting to your specification
- › Spare parts & service on request: DE / NL / EN / FR

ATTACHMENTS

Universalschaufel US-01

Universal bucket for versatile loading and clearing work. Height 75 cm, depth 85 cm, fully powder-coated. Mounting as desired.

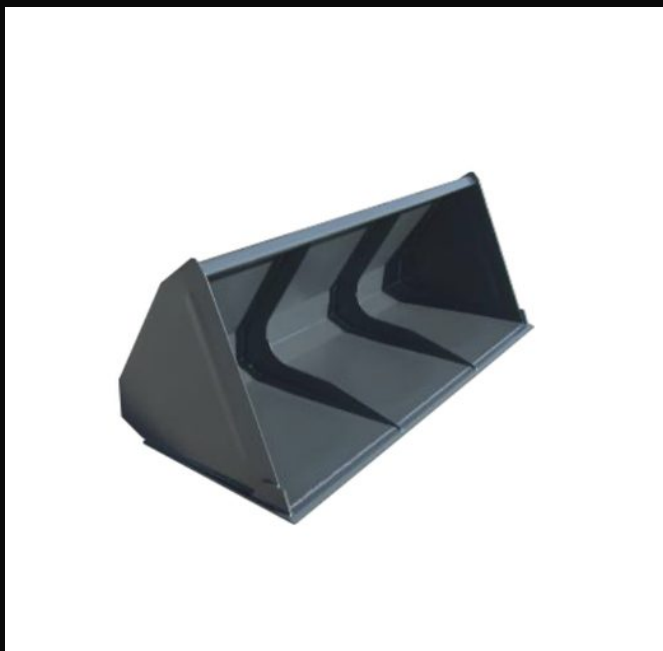

TECHNICAL DATA

- › Compatible with the GP Hoflader range
- › Heavy-duty steel construction
- › Mounting to your specification
- › Spare parts & service on request: DE / NL / EN / FR

ATTACHMENTS

Hochkippmulde GPLDW-01

High-dump bucket with large volume, available in sizes from 120 to 200 cm. Equipped with 2 cylinders, all pivot points with grease nipples, neatly routed hoses. Very stable construction, fully powder-coated. Mounting as desired.



TECHNICAL DATA

- › Compatible with the GP Hoflader range
- › Heavy-duty steel construction
- › Mounting to your specification
- › Spare parts & service on request: DE / NL / EN / FR

ATTACHMENTS

Schüttmulde GPKL-01

Rubble bucket in heavy-duty design for debris and coarse material. Fully powder-coated, mounting as desired.



TECHNICAL DATA

- › Compatible with the GP Hoflader range
- › Heavy-duty steel construction
- › Mounting to your specification
- › Spare parts & service on request: DE / NL / EN / FR

ATTACHMENTS

Pelikanschaufel GPLKP-01

Pelican bucket with hinged top clamp and large volume. Fully powder-coated, mounting as desired.



TECHNICAL DATA

- › Compatible with the GP Hoflader range
- › Heavy-duty steel construction
- › Mounting to your specification
- › Spare parts & service on request: DE / NL / EN / FR

ATTACHMENTS

Pelikanschaufel GPLKK-01

Pelican bucket with removable side walls, available in sizes from 120 to 240 cm. Bucket depth 85 cm, teeth mounted in conical bushings and replaceable, top-clamp tooth length 68 cm. Pivot points with grease nipples, mounting as desired.



TECHNICAL DATA

- › Compatible with the GP Hoflader range
- › Heavy-duty steel construction
- › Mounting to your specification
- › Spare parts & service on request: DE / NL / EN / FR

ATTACHMENTS

Mistzange GPKK-01

Manure clamp available in sizes from 100 to 240 cm. Teeth mounted in conical bushings and replaceable, lower tooth length 88 cm, upper 68 cm. Pivot points with grease nipples, mounting as desired.



TECHNICAL DATA

- › Compatible with the GP Hoflader range
- › Heavy-duty steel construction
- › Mounting to your specification
- › Spare parts & service on request: DE / NL / EN / FR

ATTACHMENTS

Pflastergabel GPWK-01

Paving fork available in sizes from 80 to 180 cm.
Teeth mounted in conical bushings and replaceable,
tooth length 110 cm. Good view of the work,
mounting as desired.



TECHNICAL DATA

- › Compatible with the GP Hoflader range
- › Heavy-duty steel construction
- › Mounting to your specification
- › Spare parts & service on request: DE / NL / EN / FR

ATTACHMENTS

Güllemixer GPMG-01

Slurry mixer with tube profiles 54x54 / 60x60 / 70x70 cm. Fully powder-coated, mounting as desired. Optionally with hydraulic drive.



TECHNICAL DATA

- › Compatible with the GP Hoflader range
- › Heavy-duty steel construction
- › Mounting to your specification
- › Spare parts & service on request: DE / NL / EN / FR

Contact

Get in touch — we will be glad to advise you personally.

G&P Benelux

Address: Amfoor 6, 5629TD Eindhoven, Netherlands

Phone: +31 687526903

Email: beneluxgp@gmail.com

Web: gpbenelux.nl

Office hours: Mon–Fri 08:00–17:00

Service & spare parts: in DE / NL / EN / FR